

#9  
September 27, 1966

Mr. A. S. Belick  
City Clerk, City of Santa Clara  
1500 Warburton Avenue  
Santa Clara, California

Subject: Agreement with City of Santa Clara  
For Improvements to Central Expressway, Unit IV  
Payment of Costs

Dear Mr. Belick:

Enclosed you will find a fully executed copy of subject agreement between the County of Santa Clara and the party (ies) named above. The Board of Supervisors at its regularly scheduled meeting on September 26, 1966 approved this agreement on behalf of the County.

The enclosed copy is for your records.

Very truly yours,

JEAN PULLAN, Clerk  
of the Board of Supervisors

By \_\_\_\_\_  
Deputy Clerk

JP: jc  
Encl.

No. 3

AGREEMENT BETWEEN THE COUNTY OF SANTA CLARA  
AND THE CITY OF SANTA CLARA FOR PAYMENT OF  
COSTS OF IMPROVEMENTS TO CENTRAL EXPRESSWAY,  
UNIT NO. IV

This is an agreement between the COUNTY OF SANTA CLARA ("County") and the CITY OF SANTA CLARA ("City").

WHEREAS, County plans to construct that portion of Central Expressway, Unit No. IV, lying between Commercial Avenue and the Calabazas Creek, and City plans to enlarge portions of and add to the proposed storm drain system and install sanitary sewer lines to accommodate drainage from sections of City; and

WHEREAS, part of the construction work proposed by City is and will be affected by part of the construction work to be done by County, and because of this City and County deem it to be in the best interests of orderly and economic construction practices to complete the work (hereinafter called "the project") under a single contract awarded and administered by County;

NOW, THEREFORE, County and City agree as follows:

1. County shall prepare plans, specifications and a list of estimated contract quantities for the construction of the improvements to the storm drain and sanitary sewer systems incidental to Central Expressway between Commercial Avenue and Calabazas Creek and shall submit the same forthwith to City for its approval.

2. Upon approval of the plans, specifications and estimated contract quantities, County shall award a single construction contract for the construction of the project, and to supervise the work of construction to completion.

3. City shall pay to County for City's share of the cost for construction of the improvements to the storm drain and sanitary sewer systems the sum derived by multiplying the final

cc: *Financial*  
*Public Works (3)*  
*City Mgr's. Office, Ad. Unit 9-30-88*

pay quantities times the bid prices times City's share for the various systems as shown on Exhibit A attached hereto. City shall pay the sum to County within thirty (30) days after the execution of this agreement. In no event shall the city's share exceed the sum of \$51,000.00.

4. If County does not award a contract for the construction of the project on or before January 1, 1967, this agreement shall terminate ipso facto upon that date and shall be of no further force or effect.

IN WITNESS WHEREOF, County and City have caused the execution of this agreement as of September 6, 1966.

COUNTY OF SANTA CLARA

By Charles A. Zinner  
Chairman, Board of Supervisors

ATTEST: JEAN PULLAN, Clerk  
Board of Supervisors

SEP 26 1966

Jean Pullan

CITY OF SANTA CLARA, a municipal corporation

By Frank H. Hayward  
Mayor

And R. H. Raffell  
City Manager

ATTEST: A. S. Belick  
A. S. BELICK, City Clerk  
City of Santa Clara

APPROVED AS TO FORM

Gerald J. Thompson  
Deputy County Counsel  
August 26, 1966

EXHIBIT "A"

System A (M.H. 12 to Outfall)

Column 1  
Oversized System Quantities

626 L.F. 42" R.C.P.  
753 L.F. 54" R.C.P.  
2,077 L.F. 60" R.C.P.  
6,645 C.Y. Trench Excavation

Column 2  
Expwy. Only Quantities

1,379 L.F. 24" R.C.P.  
2,077 L.F. 36" R.C.P.  
4,610 C.Y. Trench Excavation

After the pay quantities in System A shown above have been multiplied by the applicable bid prices, City shall pay County 50% of the total cost of the items shown in Column 1 after the total cost of the items shown in Column 2 have been subtracted therefrom.

System B (M.H. 14 Southerly)

208 L.F. 33" R.C.P.  
350 L.F. 30" R.C.P.  
700 C.Y. Trench Excavation  
2 Ea. Co. Std. Manholes

After the pay quantities in System B shown above have been multiplied by the applicable bid prices, City shall pay County 33 1/3% of the total cost of the items shown.

System C (M.H. 18 Southerly)

373 L.F. 21" R.C.P.  
360 C.Y. Trench Excavation  
1 Ea. Co. Std. Manhole

After the pay quantities in System C shown above have been multiplied by the applicable bid prices, City shall pay County 33 1/3% of the total cost of the items shown.

Extra Work (Requested by City)

1,145 L.F. 12" V.C.P.  
66 L.F. 15" R.C.P.  
66 L.F. 18" R.C.P.  
62 L.F. 21" R.C.P.  
1,260 C.Y. Trench Excavation  
4 Ea. Co. Std. Manholes

After the pay quantities shown above as Extra Work have been multiplied by the applicable bid prices, City shall pay County the total cost of the items shown.

# COUNTY OF SANTA CLARA DEPARTMENT OF PUBLIC WORKS PLAN FOR THE IMPROVEMENT OF CENTRAL EXPRESSWAY UNIT NO. 4

BETWEEN COMMERCIAL AVENUE & CALABAZAS CREEK


LENGTH = 1.32 MILES

INDEX OF SHEETS	
SHT. NO.	DESCRIPTION
1	TITLE SHEET & LOCATION MAP
2-5	TYPICAL SECTIONS
4	SPECIAL DETAILS
5-13	TOPOGRAPHY & CLEARING PLANS
14-19	LAYOUT SHEETS
20-29	CONSTRUCTION DETAILS
30-35-39	GRADE SHEETS, STORM DRAINAGE & UTILITY PLANS
34	UTILITY & SUB-DRAINAGE PLAN @ LAWRENCE EXPRESSWAY
40	MANDATORY DETOUR @ LAWRENCE EXPRESSWAY
41-54	BRIDGE @ LAWRENCE EXPRESSWAY
55-57	PUMPING STATION @ LAWRENCE EXPRESSWAY
58-60	CALABAZAS CREEK CULVERT
61-66	HIGHWAY SIGNS, TRAFFIC SIGNALS
67-75	CROSS SECTIONS
76-95	STANDARD DETAILS

ASSUMED DATUM ESTABLISHED TENTATIVE 35  
REFERENCE BENCH MARK:  
B.M.-D EL. 42.050 Top of IR 1" dia. below grade 6" left of "X"  
Line @ station 100+97.2 - CENTRAL UNIT  
# 5 T.B.M. #15.

### BENCH MARKS

B.M. No.	ELEV.	DESCRIPTION
B.M.-C	45.620	22.50 ft. in last 1/4 Sec. 107 for Road 807' W. of Cotton Road - Central Unit # 5 T.B.M. #11
B.M.-1	45.670	1/4" in top of F.H. # 67 on Corvin Drive, 325' South of "P" Line.
B.M.-2	54.485	1/4" in base of riser of old pump house, 235' right @ station 84+10.2.
B.M.-3	57.305	Top of iron 1" dia. in rim of concrete water tank, 182' right @ station 79+00
B.M.-4	56.925	1/4" cut in conc. base of fence @ SW corner UTC property, 270' left of @ Sta. 56+00
B.M.-5	57.120	1/4" in south E of California Ave, 300' E East of Commercial.
B.M.-C	66.215	1/4" Top of F.H. # NE end San Lorenzo Ave.
B.M.-7	58.08	1/4" in top foundation of SW cor. of W.P.A.R. tower @ cor. Britton & Argues, City of Sunnyvale B.M. CITY EL. 58.05.
B.M.-6	66.040	1/4" in E @ NW return of intersection of Bartlett & Acacia.
B.M.-9	68.750	Brass disk C-15 back of curb, south side California Ave. East of Fair Oaks.
B.M.-10	78.460	1/2" spike in E. California Ave. opposite Wealinghouse @ Roosevelt Ave.
B.M.-10	61.750	1/2" dia. of Kifer @ intersection of road 1/2 mile East of Sunnyvale, top of concrete foundation 15' below existing ground, under 8" x 8" post marked 2255' NW 1/4 of 1/4 Sec. 107 for Road 807' W. of Cotton Road.
B.M.-11	59.820	1/4" in SE bolt in base of electrical front of Texaco Station, side Kifer @ Lawrence Sta. Road.
B.M.-12	52.410	1/4" cut in conc. base of fence @ corner UTC property 70' left of @ Sta. 61+52.
B.M.-13	50.855	RR spike in pavement @ N.E. corner building 180' East of Copper Road.

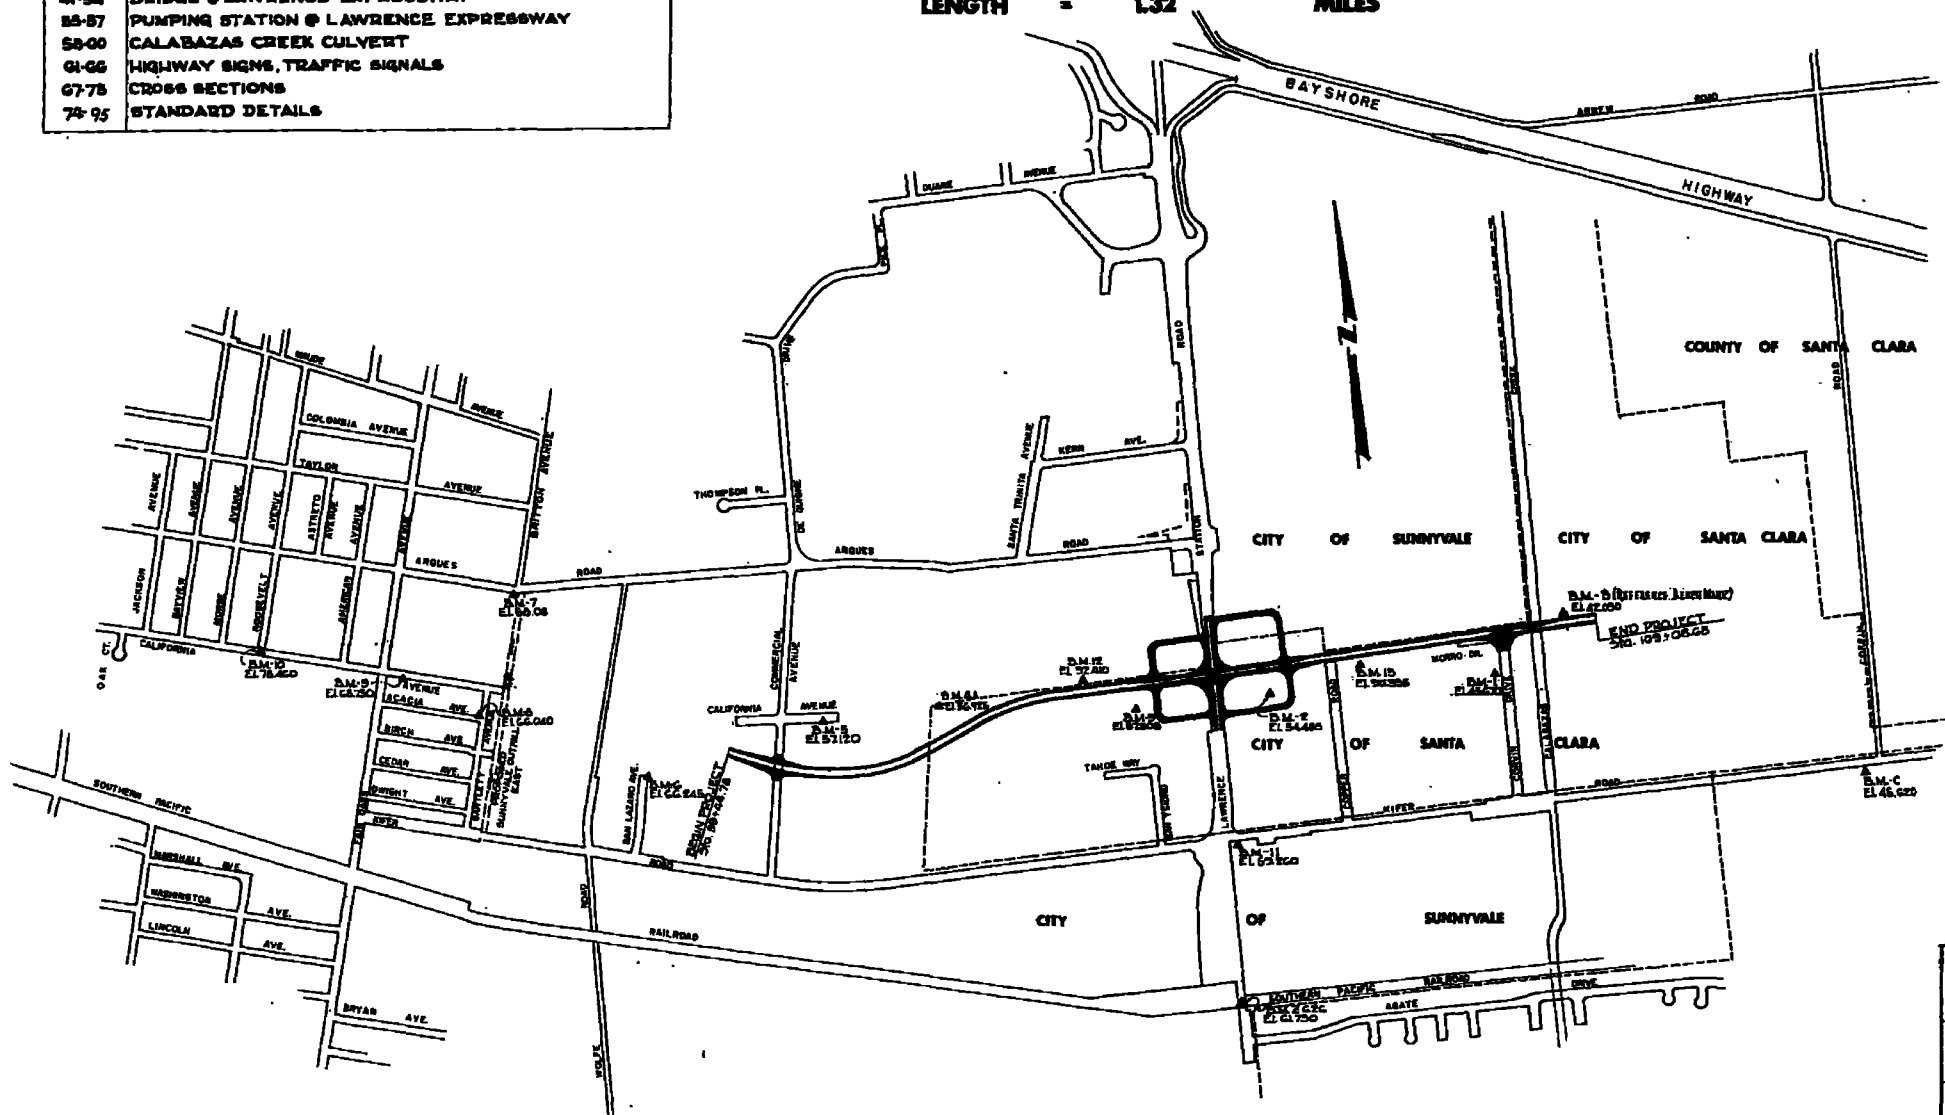

MARK THOMAS & CO. INC.  
CONSULTING CIVIL ENGINEERS  
18 NO. SAN PEDRO ST. SAN JOSE CALIFORNIA

---


COUNTY OF SANTA CLARA  
DEPARTMENT OF PUBLIC WORKS

---

TITLE SHEET, LOCATION PLAN &  
INDEX

---

SUBMITTED - CE NO. \_\_\_\_\_ APPROVED - DEPT. OF PUBLIC WORKS  
DATE \_\_\_\_\_ DRAWN - WR \_\_\_\_\_ CHECKED - GJG \_\_\_\_\_  
SHEET \_\_\_\_\_ OF \_\_\_\_\_ SHEETS FILE NO. \_\_\_\_\_



TRANSMITTAL MEMORANDUM

DEPARTMENT OF PUBLIC WORKS

DATE: Sept. 16, 1966

FOR: BOARD OF SUPERVISORS AGENDA OF Sept. 26, 1966

FROM: STEFFANI, Public Works, Design

TITLE: AGREEMENT BETWEEN COUNTY AND CITY OF SANTA CLARA FOR PAYMENT OF COSTS OF IMPROVEMENTS TO CENTRAL EXPRESSWAY, UNIT IV.

DESCRIPTION:

The storm drainage system in Central Expressway, Unit IV (between Commercial Avenue and the Calabazas Creek) has been over-sized to accommodate drainage from sections of the City of Santa Clara. City sanitary storm facilities are also being installed as part of this project.

The attached agreement, which has been executed by the City of Santa Clara, provides for payment by the City for their share of this work.

Approval is recommended.

A fully executed copy should be sent to:

Mr. A. S. Belick  
City Clerk, City of Santa Clara  
1500 Warburton Avenue  
Santa Clara, California

ECS:LM:ee

Attachments

APPROVED: James T. Pott  
JAMES T. POTT, COUNTY ENGINEER

AGENDA DATA

DATE: \_\_\_\_\_  
ITEM NO: \_\_\_\_\_  
BOARD ACTION \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_